


## Spark Arrestor Silencers

### Residential Grade AR2 Series

#### Body Style 2

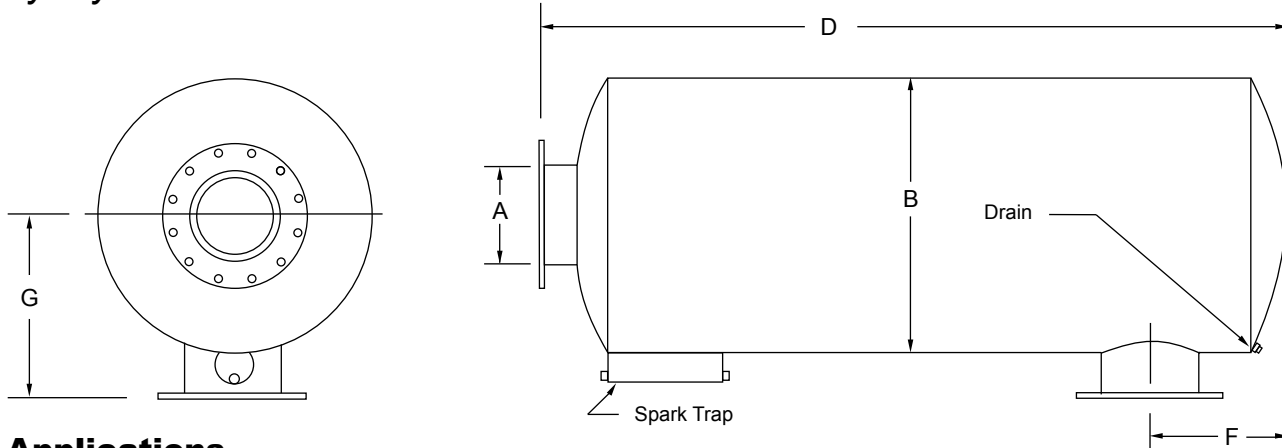

#### Applications


- The AR2 series spark arrestor should be used in areas where a fire hazard exists
- Intended for use where a moderate level of silencing is required
- A wide range of brackets are available to meet your installation needs
- Can be mounted in any position
- Average noise level reductions: 18-25 dBA

#### Construction

- Carbon steel construction is standard however other materials such as stainless steel and aluminized steel are available
- Painted with high temperature black paint
- Dual inlets as well as other inlet and outlet configurations are available
- Standard connections are ANSI flanges
- Smaller and larger sizes are available upon request

Model	A	B	D	F (min)	G	WT
AR2-04-0001	4	12	42	5	10	75
AR2-05-0001	5	14	51	6	11	125
AR2-06-0001	6	16	57	6	12	180
AR2-08-0001	8	18	69	9	13	300
AR2-10-0001	10	24	84	10	16	450
AR2-12-0001	12	26	97	12	17	700
AR2-14-0001	14	30	97	13	19	900
AR2-16-0001	16	36	110	15	22	1000
AR2-18-0001	18	48	114	16	28	1350
AR2-20-0001	20	48	138	18	28	1500

#### Representative Attenuation Curve, AR2 Series

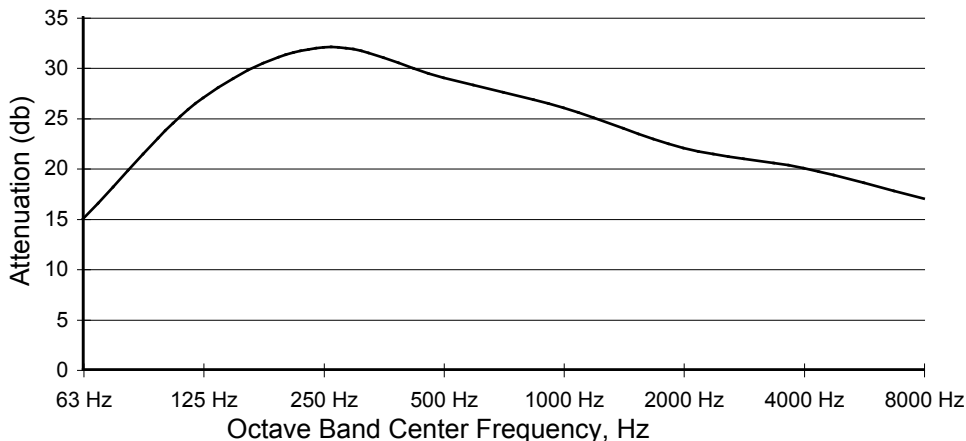

Customize your exhaust system to meet your application needs!

We will work with you to design the silencer and exhaust components that will save product cost and installation time.

BMEA-101 (10/08)

BelMar Industries

Ph: 952-486-8588

Fax: 952-486-8289

www.belmar-ind.com