


## Spark Arrestor Silencers

### Critical Grade AC1 Series

#### Body Style 1

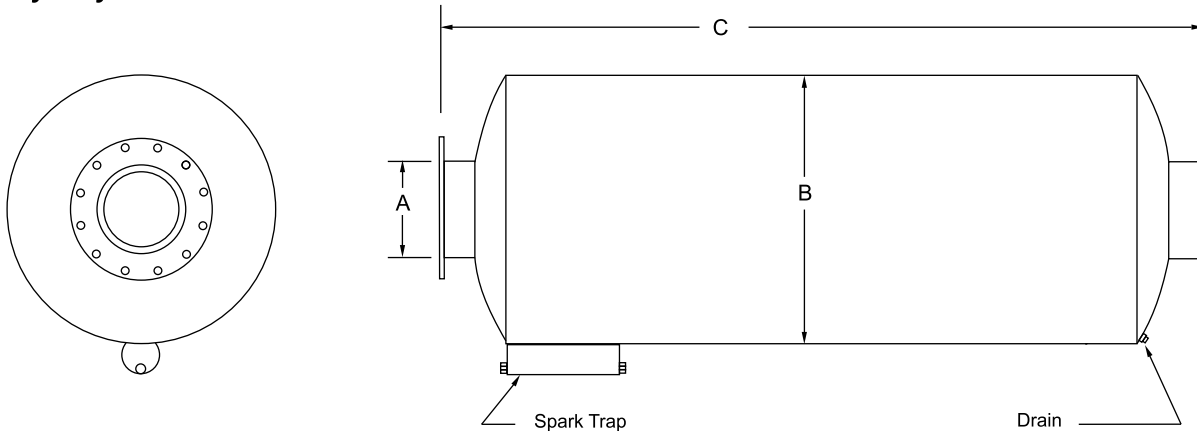

#### Applications


- The AC1 series spark arrestor should be used in areas where a fire hazard exists
- Intended for use where ambient noise levels are low and a high degree of silencing is required
- A wide range of brackets are available to meet your installation needs
- Can be mounted in any position
- Average noise level reductions: 24-34 dBA

#### Construction

- Carbon steel construction is standard however other materials such as stainless steel and aluminized steel are available
- Painted with high temperature black paint
- Dual inlets as well as other inlet and outlet configurations are available
- Standard connections are ANSI flanges
- Smaller and larger sizes are available upon request

Model	A	B	C	WT
AC1-04-0001	4	14	48	110
AC1-05-0001	5	14	48	130
AC1-06-0001	6	18	61	180
AC1-08-0001	8	22	75	290
AC1-10-0001	10	26	88	370
AC1-12-0001	12	30	102	680
AC1-14-0001	14	36	114	880
AC1-16-0001	16	42	128	1200
AC1-18-0001	18	48	141	1450
AC1-20-0001	20	48	165	1750

#### Representative Attenuation Curve, AC1 Series

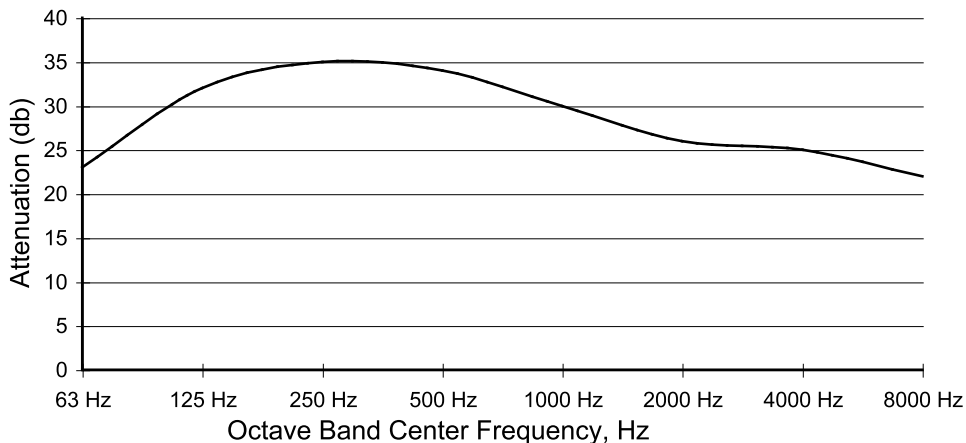

Customize your exhaust system to meet your application needs!

We will work with you to design the silencer and exhaust components that will save product cost and installation time.

BMEA-102 (10/08)

BelMar Industries

Ph: 952-486-8588

Fax: 952-486-8289

[www.belmar-ind.com](http://www.belmar-ind.com)