


Hospital Grade SH2 Series

Body Style 2

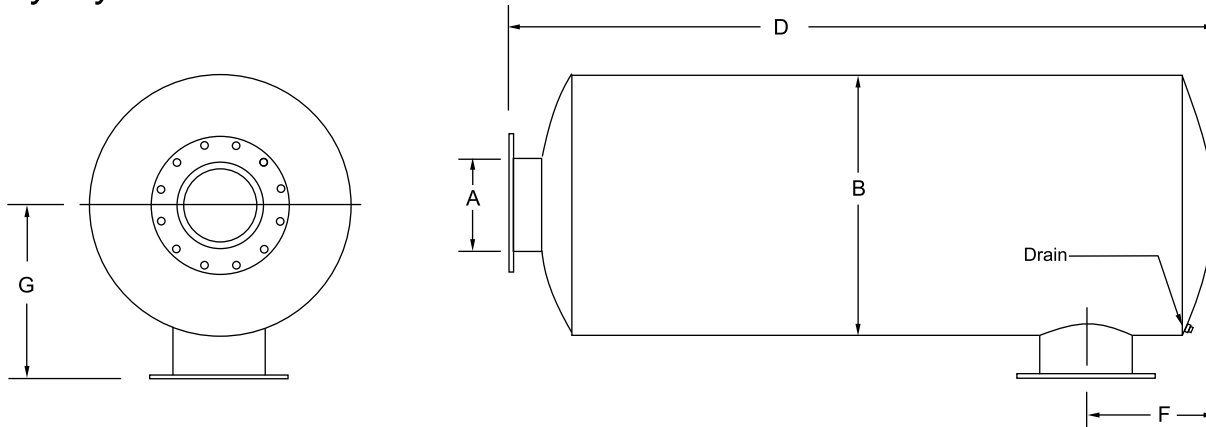

Applications


- The SH2 series is used in areas where noise levels are critical such as hospital environments
- A wide range of brackets are available to meet your installation needs
- Can be mounted in any position
- Average noise level reductions: 33-40 dBA

Construction

- Carbon steel construction is standard however other materials such as stainless steel and aluminized steel are available
- Painted with high temperature black paint
- Dual inlets as well as other inlet and outlet configurations are available
- Standard connections are ANSI flanges
- Smaller and larger sizes are available upon request

Model	A	B	D	F (min)	G	WT
SH2-04-0001	4	16	57	6	12	160
SH2-05-0001	5	18	70	8	14	220
SH2-06-0001	6	24	70	8	16	300
SH2-08-0001	8	26	96	10	17	460
SH2-10-0001	10	30	109	12	19	750
SH2-12-0001	12	36	134	14	22	1250
SH2-14-0001	14	42	162	15	25	1950
SH2-16-0001	16	42	162	17	25	2000
SH2-18-0001	18	48	174	18	28	2500
SH2-20-0001	20	54	176	20	31	3300

Representative Attenuation Curve, SH2 Series

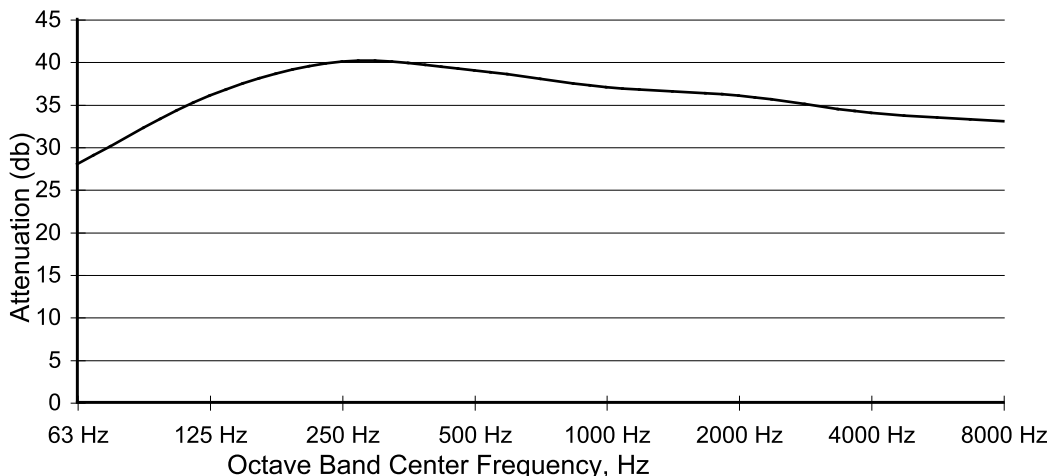

Customize your exhaust system to meet your application needs!

We will work with you to design the silencer and exhaust components that will save product cost and installation time.