

Chamber/Packed Discharge Silencer BR2 Series


Features

Model BR2 blower bases with model KC2 discharge silencers are designed for premium grade noise reduction when used in above transition speed applications. Fabricated of commercial grade carbon steel and include horizontal stiffeners located across the bottom side of table top. Units are standard with a coat of gray primer.

Design includes a female NPT relief valve port (shipped without steel plug) and 1/2 inch half coupling & plug auxiliary port intended for customer supplied temperature or pressure gauge.

See model KC2 catalog page for attenuation information. Custom designs quoted upon request.

- A1 blower connections are pipe stub up to 4 inch and tube stub on 5 & 6 inch
- A2 end connections are male NPT up to 5 inch and flanged on 6 inch
- Holes in base mounting pad feet are 3/4 inch

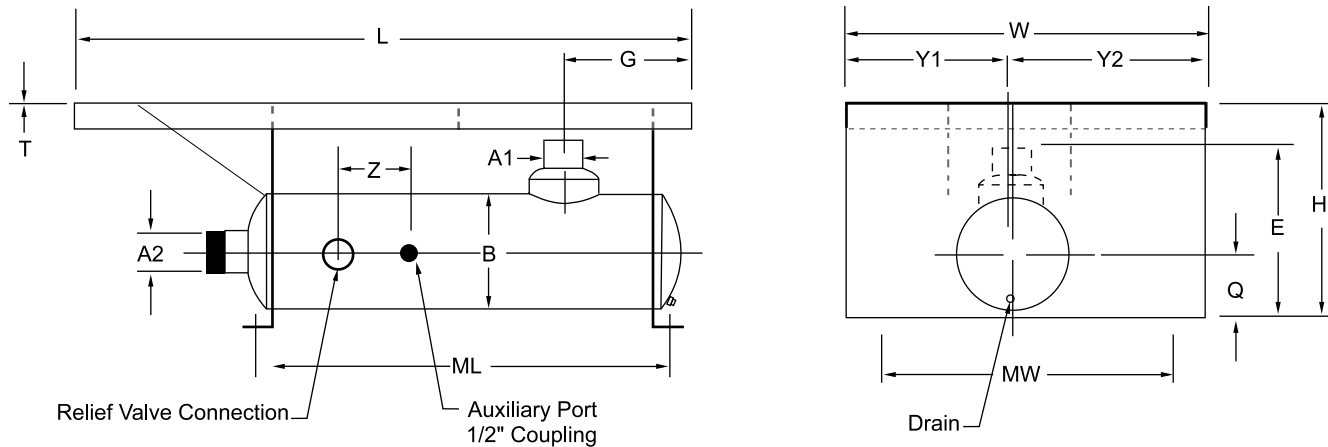

Model	L	W	T	G	A1	A2	Y1	Y2	B	H	E	Q	ML	MW	Z	R.V.
	(outside)															
BR2-02	42	28	3/16	8.5	2	2	11	17	8	18	14	5	26	21.5	6.5	2
BR2-25	42	28	3/16	10	2.5	2.5	12	16	10	20	16	6	27	21.5	6.5	2
BR2-03	56	33	3/16	12	3	3	15	18	10	20	16	6	37.5	26.5	6.5	2
BR2-04	56	33	3/16	13	4	4	15	18	14	27	22.5	8	43.5	26.5	6.5	2
BR2-05	66	35	1/4	13	5	5	17.5	17.5	16	30	25.5	9	54.5	28.38	7.5	3
BR2-06	66	35	1/4	13	6	6	17.5	17.5	18	34	30.5	10	60.5	28.38	7.5	3