


Inlet and Discharge Silencers

Chamber/Non-Packed Silencer JC4 Series

JC4

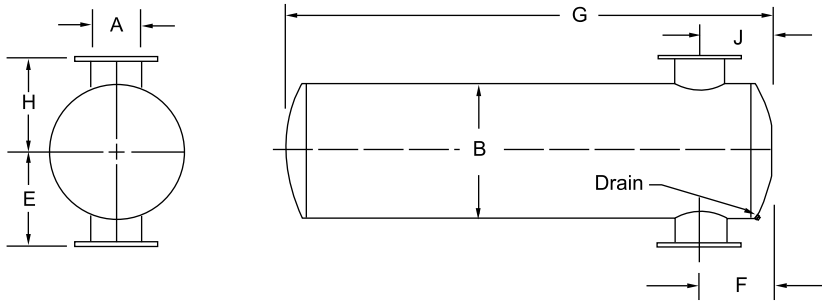


A	B	G	E	H	F inlet (min/max)	J outlet (min/max)	WT
4	14	47	10	10	8/16	8/16	85
5	16	60	11	11	9/19	9/19	150
6	18	66	12	12	10/22	10/22	190
8	22	91	14.50	14.50	12/29	12/29	380
10	26	116	16.50	16.50	14/40	14/40	560
12	30	129	18.50	18.50	15/42	15/42	870
14	36	155	21.50	21.50	17/49	17/49	1490
16	42	175	24.50	24.50	19/55	19/55	2080
18	48	182	27.50	27.50	21/56	21/56	2600
20	48	195	28.50	28.50	22/61	22/61	2970
22	54	197	31.50	31.50	24/30	24/30	3925
24	54	232	31.50	31.50	25/76	25/76	4560

- 4 inch to 5 inch connection sizes are standard with MNPT, 6 inch and up are 150 # ANSI drilled plate flanges
- 4 inch and 5 inch are optional with MNPT or plate flanges
- Dimensions are in inches, weights in pounds
- All products optional in stainless steel grades, ASME code and various other construction features
- Nozzle elevations or orientations can be modified, please contact BelMar to discuss your preferences

Performance Data JC Series

Representative Attenuation Curve

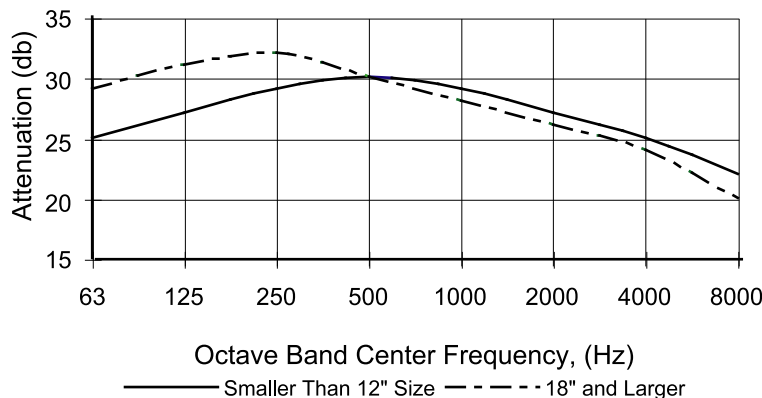

Pressure Drop vs. Exit Velocity*

