


Inlet and Discharge Silencers

Multi-Chamber/Non-Packed Silencer JH4 Series

JH4

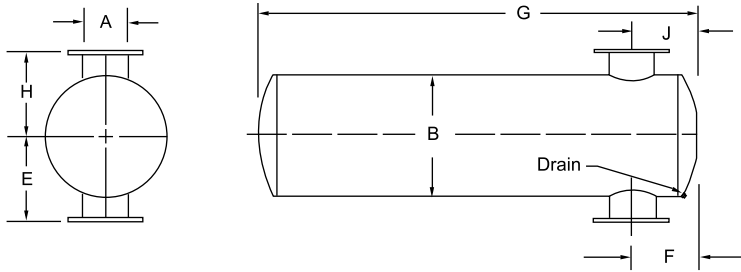


A	B	G	E	H	F inlet (min/max)	J outlet (min/max)	WT
3	12	37	9	9	5/13	5/13	70
4	14	56	10	10	6/20	6/20	150
5	16	68	11	11	7/25	7/25	200
6	18	69	12	12	8/25	8/25	240
8	26	108	16.50	16.50	10/41	10/41	590
10	30	133	18.50	18.50	12/51	12/51	890
12	36	135	21.50	21.50	14/50	14/50	1280
14	36	165	21.50	21.50	16/63	16/63	1610
16	42	178	24.50	24.50	18/51	18/51	1960
18	48	185	27.50	27.50	20/48	20/48	2710
20	48	210	28.50	28.50	22/56	22/56	3090

- 3 inch to 5 inch connection sizes are standard with MNPT, 6 inch and up are 150 # ANSI drilled plate flanges
- 4 inch and 5 inch are optional with MNPT or plate flanges
- Dimensions are in inches, weights in pounds
- All products optional in stainless steel grades, ASME code and various other construction features
- Nozzle elevations or orientations can be modified, please contact BelMar to discuss your preferences

Performance Data JH Series

Representative Attenuation Curve

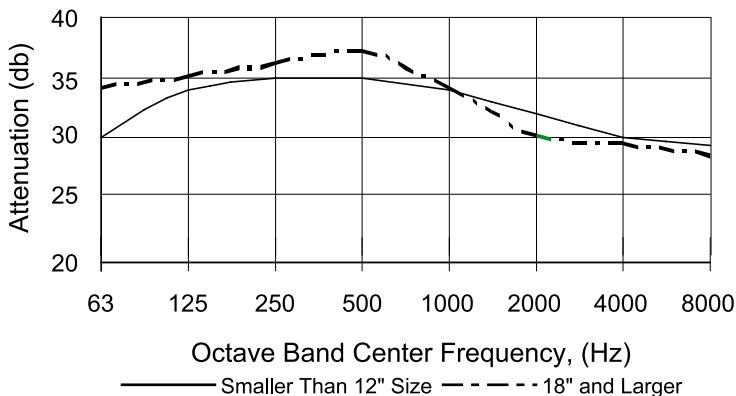

Pressure Drop vs. Exit Velocity*

