


Spark Arrestor Silencers

Residential Grade AR1 Series

Body Style 1

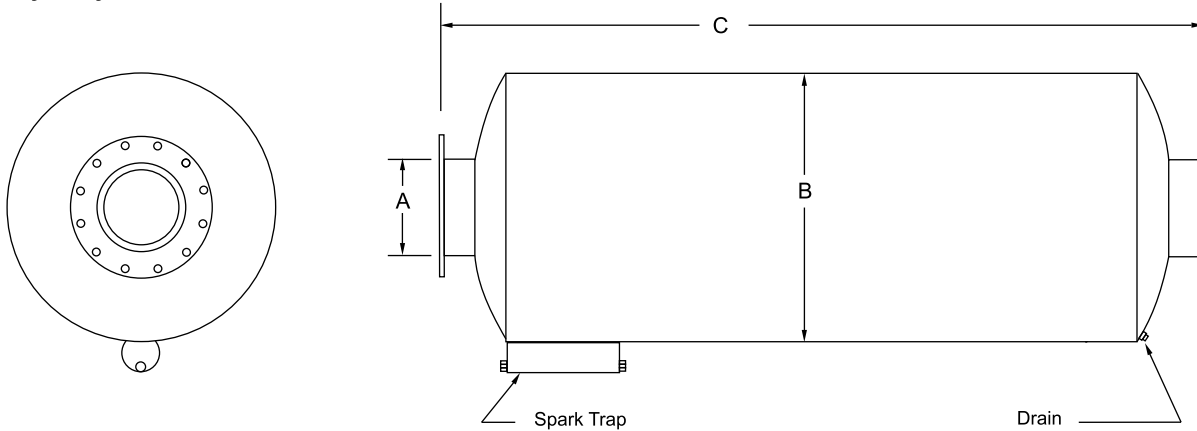

Applications


- The AR1 series spark arrestor should be used in areas where a fire hazard exists
- Intended for use where a moderate level of silencing is required
- A wide range of brackets are available to meet your installation needs
- Can be mounted in any position
- Average noise level reductions: 18-25 dBA

Construction

- Carbon steel construction is standard however other materials such as stainless steel and aluminized steel are available
- Painted with high temperature black paint
- Dual inlets as well as other inlet and outlet configurations are available
- Standard connections are ANSI flanges
- Smaller and larger sizes are available upon request

Model	A	B	C	WT
AR1-04-0001	4	12	42	75
AR1-05-0001	5	14	54	125
AR1-06-0001	6	16	61	180
AR1-08-0001	8	18	88	300
AR1-10-0001	10	24	75	450
AR1-12-0001	12	26	88	700
AR1-14-0001	14	30	102	900
AR1-16-0001	16	36	90	1000
AR1-18-0001	18	48	106	1350
AR1-20-0001	20	48	118	1500

Representative Attenuation Curve, AR1 Series

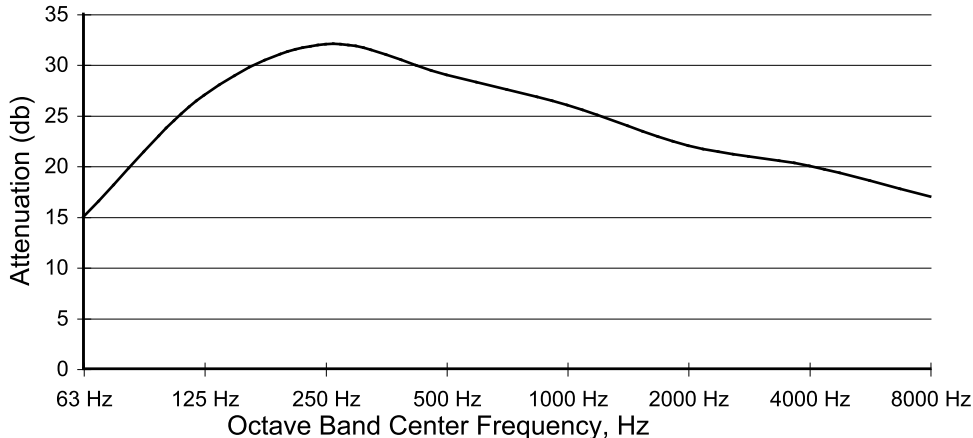

Customize your exhaust system to meet your application needs!

We will work with you to design the silencer and exhaust components that will save product cost and installation time.

BMEA-101 (10/08)

BelMar Industries

Ph: 952-486-8588

Fax: 952-486-8289

www.belmar-ind.com