


Spark Arrestor Silencers

Hospital Grade AH2 Series

Body Style 2

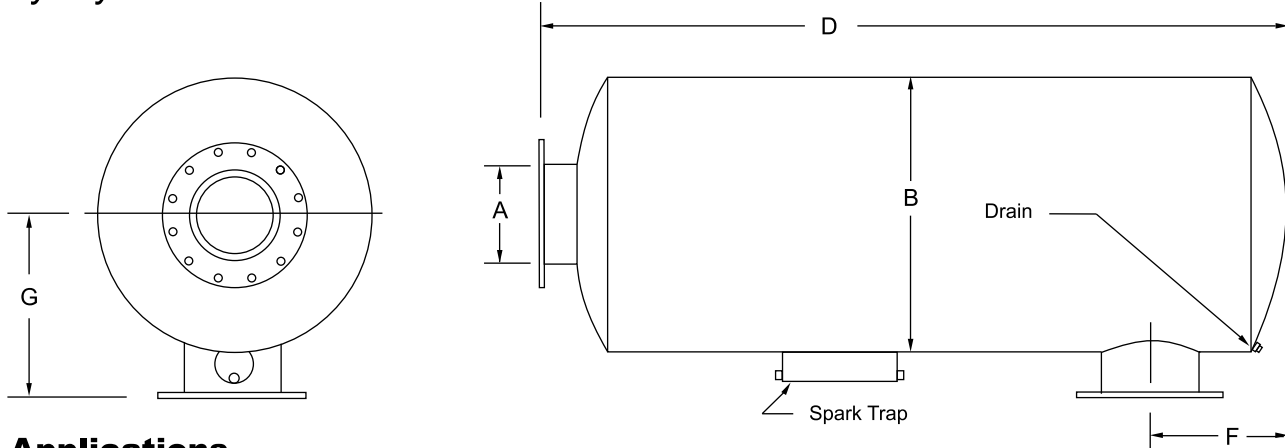

Applications


- The AH2 series spark arrestor should be used in areas where a fire hazard exists
- Intended for use in areas where people will be in close proximity
- A wide range of brackets are available to meet your installation needs
- Can be mounted in any position
- Average noise level reductions: 33-40 dBA

Construction

- Carbon steel construction is standard however other materials such as stainless steel and aluminized steel are available
- Painted with high temperature black paint
- Dual inlets as well as other inlet and outlet configurations are available
- Standard connections are ANSI flanges
- Smaller and larger sizes are available upon request

Model	A	B	D	F (min)	G	WT
AH2-04-0001	4	16	57	6	12	180
AH2-05-0001	5	18	70	8	14	260
AH2-06-0001	6	24	71	8	16	310
AH2-08-0001	8	26	96	10	17	470
AH2-10-0001	10	30	110	12	19	800
AH2-12-0001	12	36	134	14	22	1350
AH2-14-0001	14	42	162	15	25	2000
AH2-16-0001	16	42	162	17	25	2100
AH2-18-0001	18	48	176	18	28	2500
AH2-20-0001	20	54	180	20	31	3400

Representative Attenuation Curve, AH2 Series

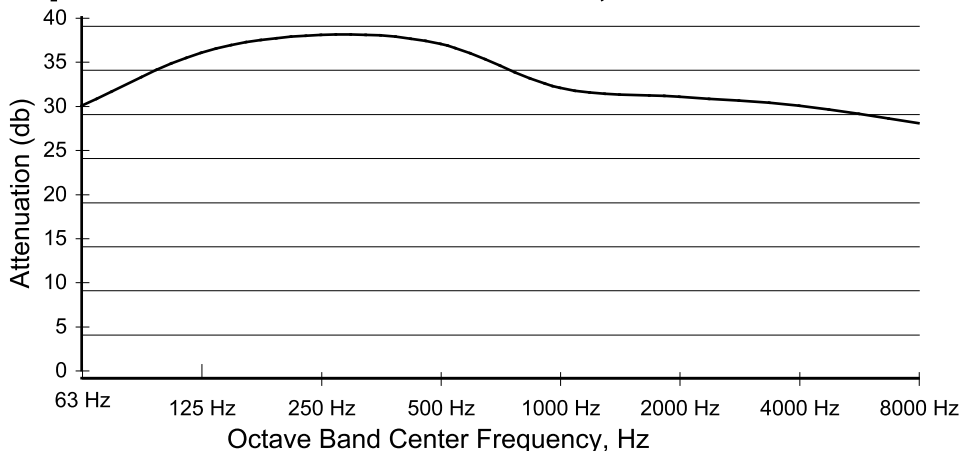

Customize your exhaust system to meet your application needs!

We will work with you to design the silencer and exhaust components that will save product cost and installation time.

BMEA-103 (10/08)

BelMar Industries

Ph: 952-486-8588

Fax: 952-486-8289

www.belmar-ind.com