


Critical Grade SC2 Series

Body Style 2

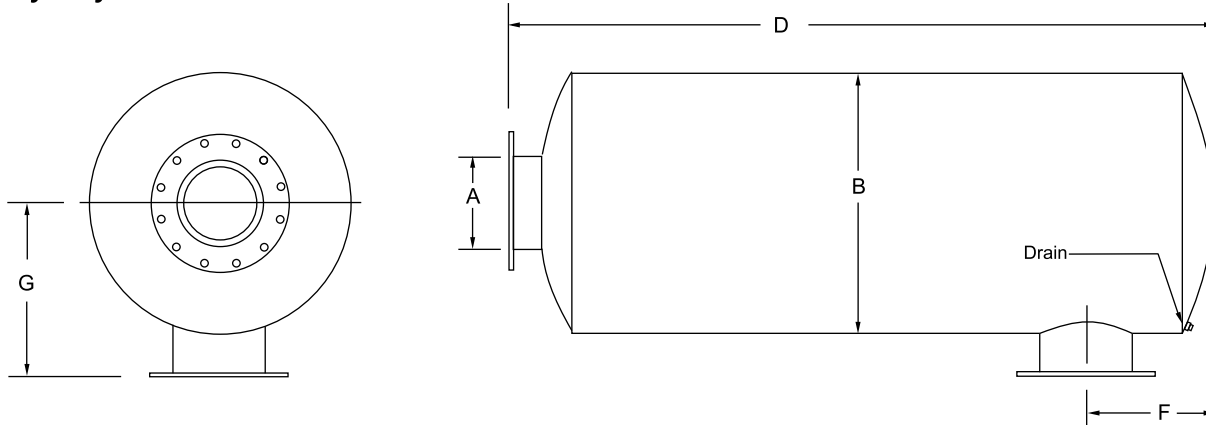

Applications


- The SC2 series is for use where ambient noise levels are low and a high degree of silencing is required
- A wide range of brackets are available to meet your installation needs
- Can be mounted in any position
- Average noise level reductions: 24-34 dBA

Construction

- Carbon steel construction is standard however other materials such as stainless steel and aluminized steel are available
- Painted with high temperature black paint
- Dual inlets as well as other inlet and outlet configurations are available
- Standard connections are ANSI flanges
- Smaller and larger sizes are available upon request

Model	A	B	D	F (min)	G	WT
SC2-04-0001	4	10	51	5	9	75
SC2-05-0001	5	12	57	6	10	85
SC2-06-0001	6	14	63	7	11	90
SC2-08-0001	8	22	71	9	15	250
SC2-10-0001	10	24	96	11	16	350
SC2-12-0001	12	30	96	13	19	550
SC2-14-0001	14	36	110	15	22	750
SC2-16-0001	16	42	124	17	25	1000
SC2-18-0001	18	48	138	18	28	1350
SC2-20-0001	20	48	162	19	28	1650

Representative Attenuation Curve, SC2 Series

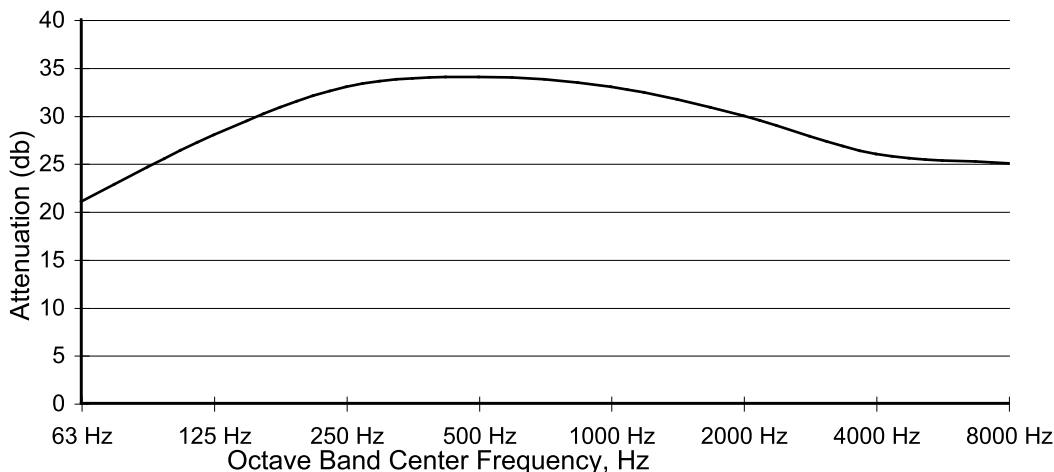

Customize your exhaust system to meet your application needs!

We will work with you to design the silencer and exhaust components that will save product cost and installation time.

BMES-102 (10/08)

BelMar Industries

Ph: 952-486-8588

Fax: 952-486-8289

www.belmar-ind.com